

AK SERIES GENERATOR GANGING

SPECIFICATION SHEET

Amerec steam generators may be ganged together to supply steam to rooms larger than what a single 14kW unit can accommodate. When ganging generators, only one has a control and temperature sensor connected. Secondary units mimic the primary unit, making the system operation as simple as controlling a single generator.


- Each steamer requires at least one ComfortFlo steam head (we recommend at least 2 heads for 14kW units) and more steam heads per unit may be desirable to reduce steam noise.
- Each steamer will need its own automatic drain valve kit
- Each steamer will need its own drip pan

Note: You may gang an AK steamer only with other AKs.

Required Part

- Item #5304-031 AK Ganging cable.
One required for each secondary steamer.

For further information, refer to Amerec doc:
4211-1552 AK Installation Instructions

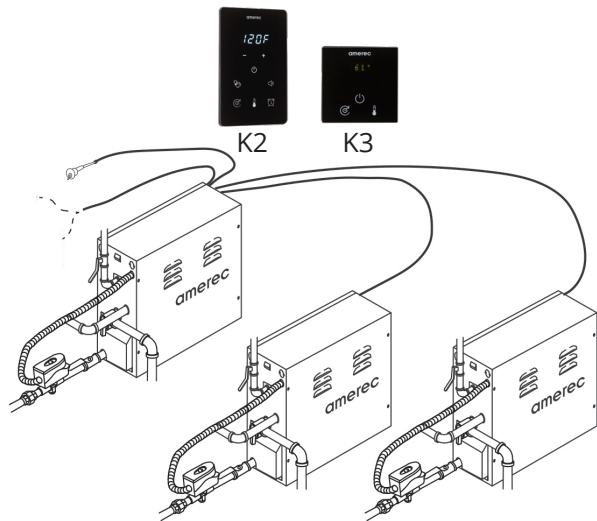

Ganged System Ratings

		Max cu ft	Max cu m	Steamer Models Used			
System kW	kW			Qty	Model	Qty	Model
AK 18	18	700	19.8	2	AK 9		
AK 22	22	900	25.5	2	AK 11		
AK 28	28	1100	31.2	2	AK 14		
AK 30	31	1300	36.8	1	AK 9	2	AK 11
AK 36	36	1500	42.5	2	AK 11	1	AK 14

AMEREC
575 Cokato Street E. | Cokato, MN 55321
Toll-Free 1-800-331-0349
amerec@amerec.com | www.amerec.com

Amerec reserves the right to change specifications and design without notice.
© 2025 Amerec Steam

4220-339 rev 07/2025

amerec

THE COMFORT OF WELLBEING